



THE ELITE SERIES

ROCKY AIR COMPRESSOR

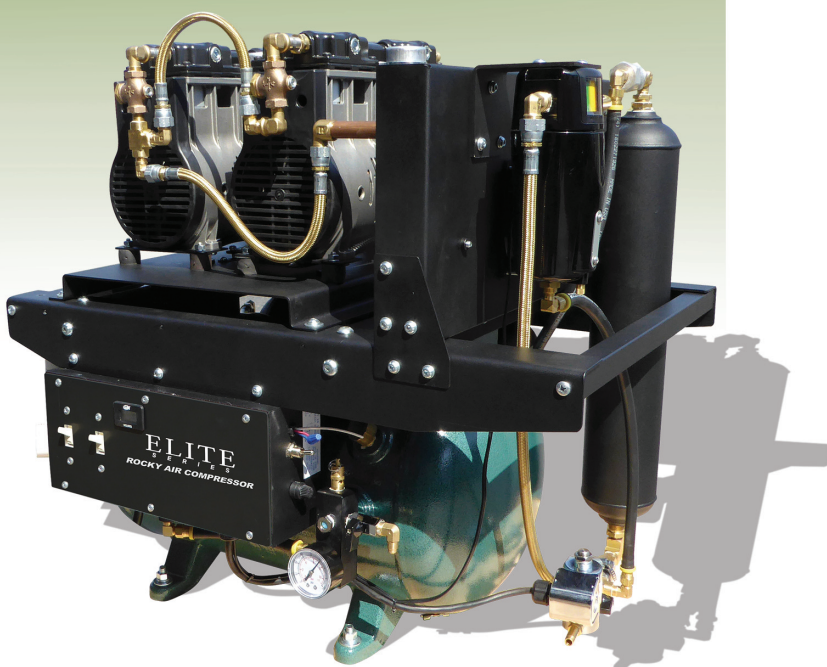

- VERY QUIET MOTOR DESIGN ONLY 64 DB-A
- ALL AIR RECEIVER TANKS HAVE INTERNAL EPOXY COATING APPLIED
- THE AIR IS DRIED BEFORE THE TANK TO PREVENT BACTERIA BUILD UP IN THE TANK
- ALL MODELS HAVE DESICCANT AIR DRYING SYSTEMS
- ROCKING PISTON TECHNOLOGY DECREASES NOISE AND INCREASES MOTOR LIFE
- TEFLON COATED PISTONS AND SLEEVES ENSURE LONG LIFE OF THE COMPRESSOR HEADS
- REMOTE AIR INTAKE FILTERS TRAP DIRT, DUST AND AIR BORN POLLUTANTS
- ENERGY EFFICIENT THERMALLY PROTECTED SPLIT PHASE MOTORS
- MOISTURE INDICATORS STANDARD ON ALL MODELS

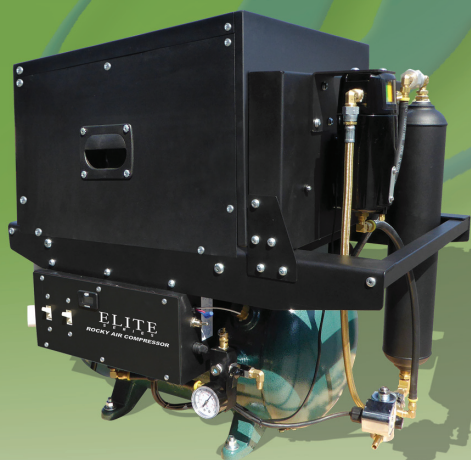

TECHWESTINC

Manufacturers of Dental Vacuum
and Air Systems

2625 N. Argyle Ave. • Fresno, CA 93727
(559) 291-1650 • (800) 428-7139 • FAX (559) 348-9677

ELITE SERIES ROCKY AIR COMPRESSOR

The Tech West Rocky Series Oilless Air Compressors provide 100% oil free air to the dental office. With our high performance air drying system, we guarantee the clean dry air you expect. The design of the Tech West Rocky Series Air Compressor provides smooth, quiet, vibration free operation at only 65 dB-a noise level. They meet most any need of today's Dental Practice.

Tech West will provide full plumbing and electrical design upon request.

FEATURES

Desiccant Air Dryer with .01 micron filtration

Rocking piston design

USA built electrical motors

Integrated carrying handles

Moisture indicators on the air line

BENEFITS

Assures clean, dry air with a dew point of -25 degrees

Reduces noise and increases piston seal life

Gives the motor a voltage range of 208-245 so a buck boost transformer is not needed

Makes for easy moving and installation

Gives you an early indication of moist air prior to moisture getting into your air lines.

MODEL NUMBER	MAX USERS	AIR DRYER	QUIET COVER	# OF HEADS	TOTAL H.P.	CFM	TANK GALLONS	VOLTAGE	TOTAL AMPS	BREAKER SIZE	DB(A)	EQUIP. HEIGHT	EQUIP. HEIGHT	EQUIP. WIDTH	EQUIP. DEPTH	SHIPPING WEIGHT	SHIPPING HEIGHT	SHIPPING WIDTH	SHIPPING DEPTH
ACOR2D1	2-3	YES	NO	2	1.5	5.2	10	115	11	20	68	175	28	28	20.5	220	37	35	30
ACOR2D1Q	2-3	YES	YES	2	1.5	5.2	10	115	11	20	64	210	31	28	20.5	255	41	42	31
ACOR2D2	2-3	YES	NO	2	1.5	5.2	10	208/230	8	20	68	175	28	28	20.5	220	37	35	30
ACOR2D2Q	2-3	YES	YES	2	1.5	5.2	10	208/230	8	20	64	210	31	28	20.5	255	41	42	31

A 5 YEAR 3500 HOUR MOTOR WARRANTY. All other components carry a 2 year warranty.



Manufacturers of Dental Vacuum
and Air Systems

Revised 3/20

Exceeds NFPA 99C Guidelines

Complies to UL Standards
ANSI/UL 544.

CSA
214014

2625 N. Argyle Ave. • Fresno, CA 93727
(559) 291-1650 • (800) 428-7139 • FAX (559) 348-9677

FDA
RECOGNIZED